




Type 26 Catch Basin

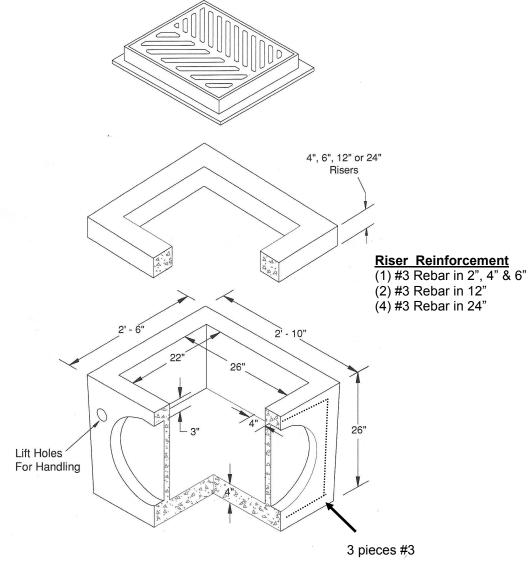

Rebar Placement

#3 Rebar 1" from top, 1" from bottom. "#3 Rebar in each corner 1" in from corner.

<u>Top Unit</u>

Frame and grate available.

<u>Risers</u>

2", 4", 6", 12", 24" risers available.

Base Section

Clear opening of knockouts is 18". Knockouts provided on four sides. <u>Notes</u> All concrete is 4,000 PSI minimum. All rebar meets ASTM A615, grade 60.

Weight is 1033 lbs.

- Scale-

All dimensions subject to allowable specification tolerances.